


ZF1000W

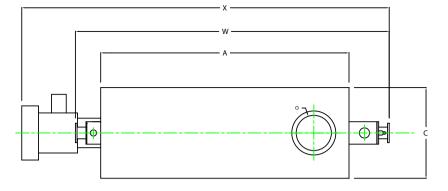

CHIMNEY FLANGE DIMS: O.D. = 25" I.D. = 20-1/4" B.C.D = 22-1/2" NO. OF HOLES = 8 HOLE DIAMETER = 0.53"

PLAN



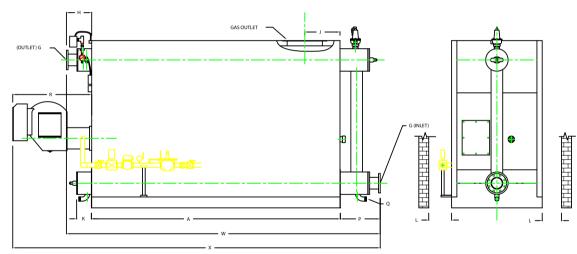

SIDE VIEW

REAR VIEW

UNILUX ADVANCED MFG.,LLC 30 COMMERCE PARK DRIVE NISKAYUNA, NY 12309 Ph: (518) 344-7490 Fax: (518) 344-7495

П	BOILER MODEL - ZF1000W	INCHES	METRIC
Α	LENGTH OF BASE	141 1/2	3594
A1	LENGTH OF SUPPORT FROM BASE	-	-
В	HEIGHT	95	2413
C	WIDTH OF BASE	51 1/2	1308
D	CTR. LOWER DRUM TO CTR. UPPER DRUM	70	1778
Е	CENTER OF LOWER DRUM TO BOTTOM	14	356
F	CENTER OF BURNER OPENING TO BOTTOM	39 1/2	1003
G	INLET / OUTLET FLANGE. CLASS 150	6	152
Н	NOZZLE CLEARANCE FROM TOP, FRONT	14 1/4	362
J	CENTER OF FLUE GAS OUTLET TO REAR	20	508
K	DRUM CLEARANCE FROM BASE, FRONT	8 5/8	219
L	TUBE REMOVAL CLEARANCE FROM BASE	34	864
М	UPPER DRUM, OD, NPS	12 3/4	324
Ν	LOWER DRUM, OD, NPS	12 3/4	324
0	FLUE GAS OUTLET, ID	20	508
Р	NOZZLE CLEARANCE FROM BASE, REAR	22 5/8	575
Q	BLOWDOWN, NPT	2	51
R	BURNER DIMENSION	44 7/8	1140
W	OVERALL BOILER LENGTH	178 3/8	4531
Χ	OVERALL BOILER LENGTH WITH BURNER	209	5309

NOTE: DIMENSIONS SUBJECT TO CHANGE WITHOUT NOTICE CONSULT FACTORY FOR CERTIFIED DIMENSIONS.

NOTE: "X" DIMENSION MAY VARY BASED ON BURNER